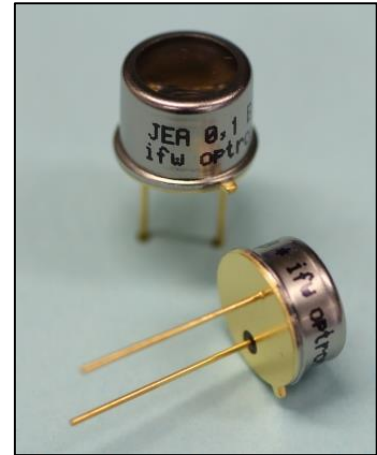


Characteristics :


- ◆ 1 mm² active area SiC-photodiode
- ◆ UV-filters for UVA-, UVB- and UVC-range
- ◆ more UV-filter options available
- ◆ hermetically sealed TO-package
- ◆ RoHS, REACH and WEEE conform

Applications :

- ◆ optical measurement in UV-range with selected spectral range
- ◆ control of sterilization lamps
- ◆ flame control
- ◆ sun light measurement

**Maximum Ratings :**

- ◆ reverse voltage U_R 20 V
- ◆ operating temperature range - 40 °C ... 150 °C
- ◆ storage temperature range - 40 °C ... 150 °C
- ◆ soldering temperature (3s) 260 °C

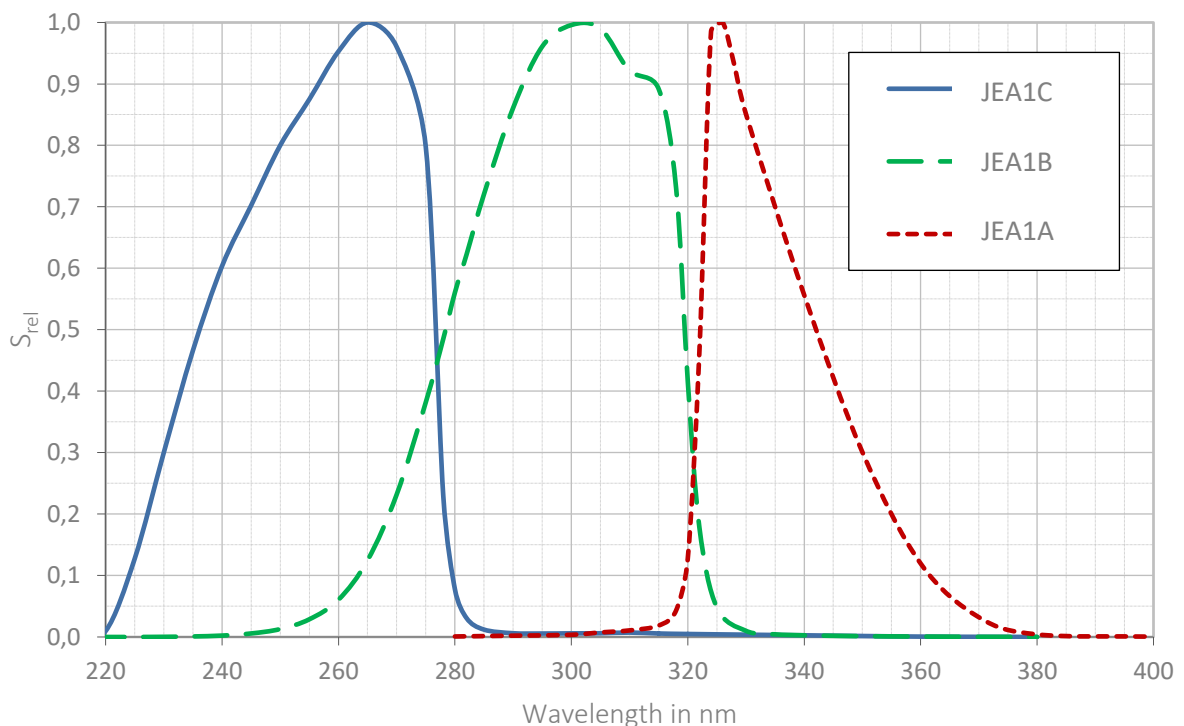Relative Spectral Responsivity S_{rel} :

Rev. 4 (08/2021)

Technical Data:

Parameter	Test Conditions	UV-A	UV-B	UV-C	Unit	
active area		1,04 x 1,04			mm ²	
spectral range	S = 0,1 * S _{max}	λ_{short}	318	265	225	nm
		λ_{long}	360	322	280	nm
wavelength of maximum responsivity λ_{Smax}		325	300	265	nm	
maximum responsivity S _{max}	$\lambda = \lambda_{Smax}$	0,09	0,12	0,16	A/W	
dark current I _R	U _R = 1 V	200			fA	
junction capacitance C _j (max.)	f = 10 kHz	70			pF	
rise time t _r of photocurrent	10%/90% R _L = 50 Ω $\lambda = 266$ nm	<1,3			ns	
field of view	Anode isolated	±30	±30	±45	degree	
	Cathode isolated	±27				
	A. + C. isolated	±27				
weight		1,1			gramm	
package/drawing	Anode isolated	TO5	TO5	TO5-flat		
	Cathode isolated	TO5				
	A. + C. isolated	TO5-isolated				

typical values; test conditions, as not otherwise specified: T_A = 25 °C, U_R = 0 V

Versions:

Filter	Anode: isolated Cathode: case-pin	Cathode: isolated Anode: case-pin	Anode, Cathode: isolated Additional case-pin	Operating Temperature: 250 °C
UV-A	JEA1A	JEAC1A	JEA1A-I	*-UT
UV-B	JEA1B	JEAC1B	JEA1B-I	
UV-C	JEA1C	JEAC1C	JEA1C-I	

Further available optical filters:

Filter	Spectral-range	Part
UV-AB	280-365 nm	JEA1AB
UV-BC	228-322 nm	JEA1BC
UV-DVGW	240-290 nm	JEA1DVGW
Erythema	CIE 87	JEA1E


Further available active areas:

Active Area
0,1 mm ²
0,25 mm ²
2 mm ²
5 mm ²

Further available packages:

Package	Parts	Datasheet
TO18	JEA1A/B/C-S	on request

Package Dimensions:

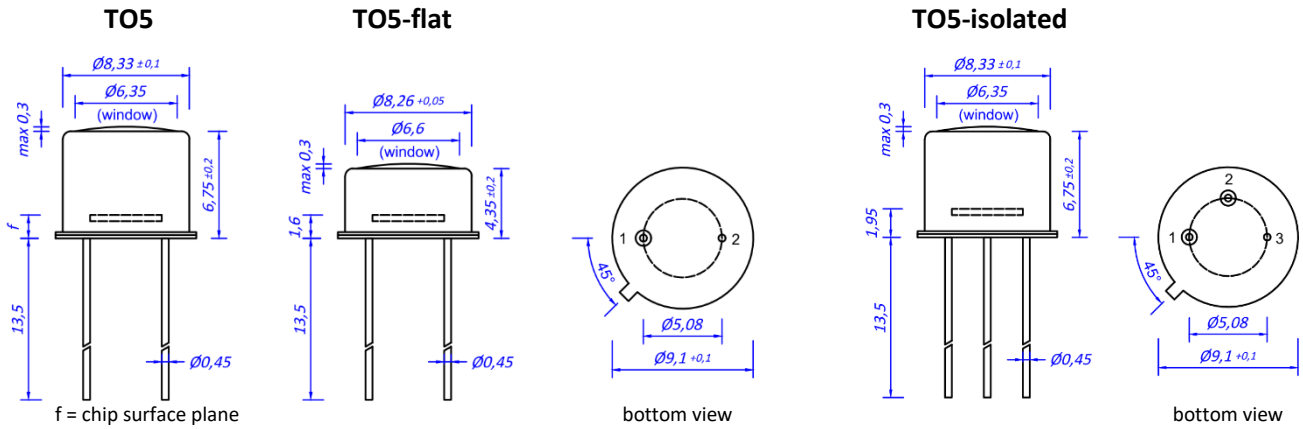


Anode isolated: Pin 1: Anode
Pin 2: Cathode + Case
f = 1,6 mm


Anode + Cathode isolated: Pin 1: Anode
Pin 2: Cathode
Pin 3: Case

Cathode isolated: Pin 1: Cathode
Pin 2: Anode + Case
f = 1,85 mm

Application Example:

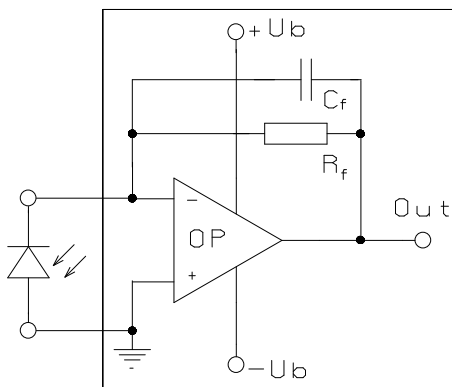

Junction Capacitance C_j vs. Reverse Voltage U_R :

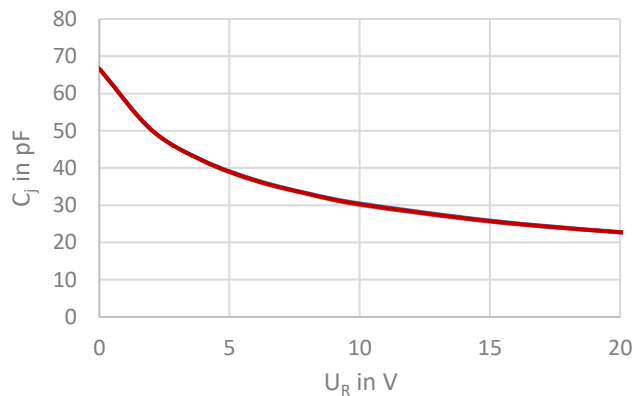

The application example shows a typical circuit R_f is responsible for the gain of the circuit C_f compensates the reverse junction capacitance of the photodiode and the input capacitance of the opamp. The exact value of C_f depends on R_f , used opamp and capacitance of the circuit. A typical value is 1pF.

The chart shows the typical dependence of junction capacitance C_j vs. applied reverse voltage U_R . Lower intrinsic capacitance can be used to increase the bandwidth (lower the rise time) in electric circuits.